


# Steeline OGEE

OGEE

ST13

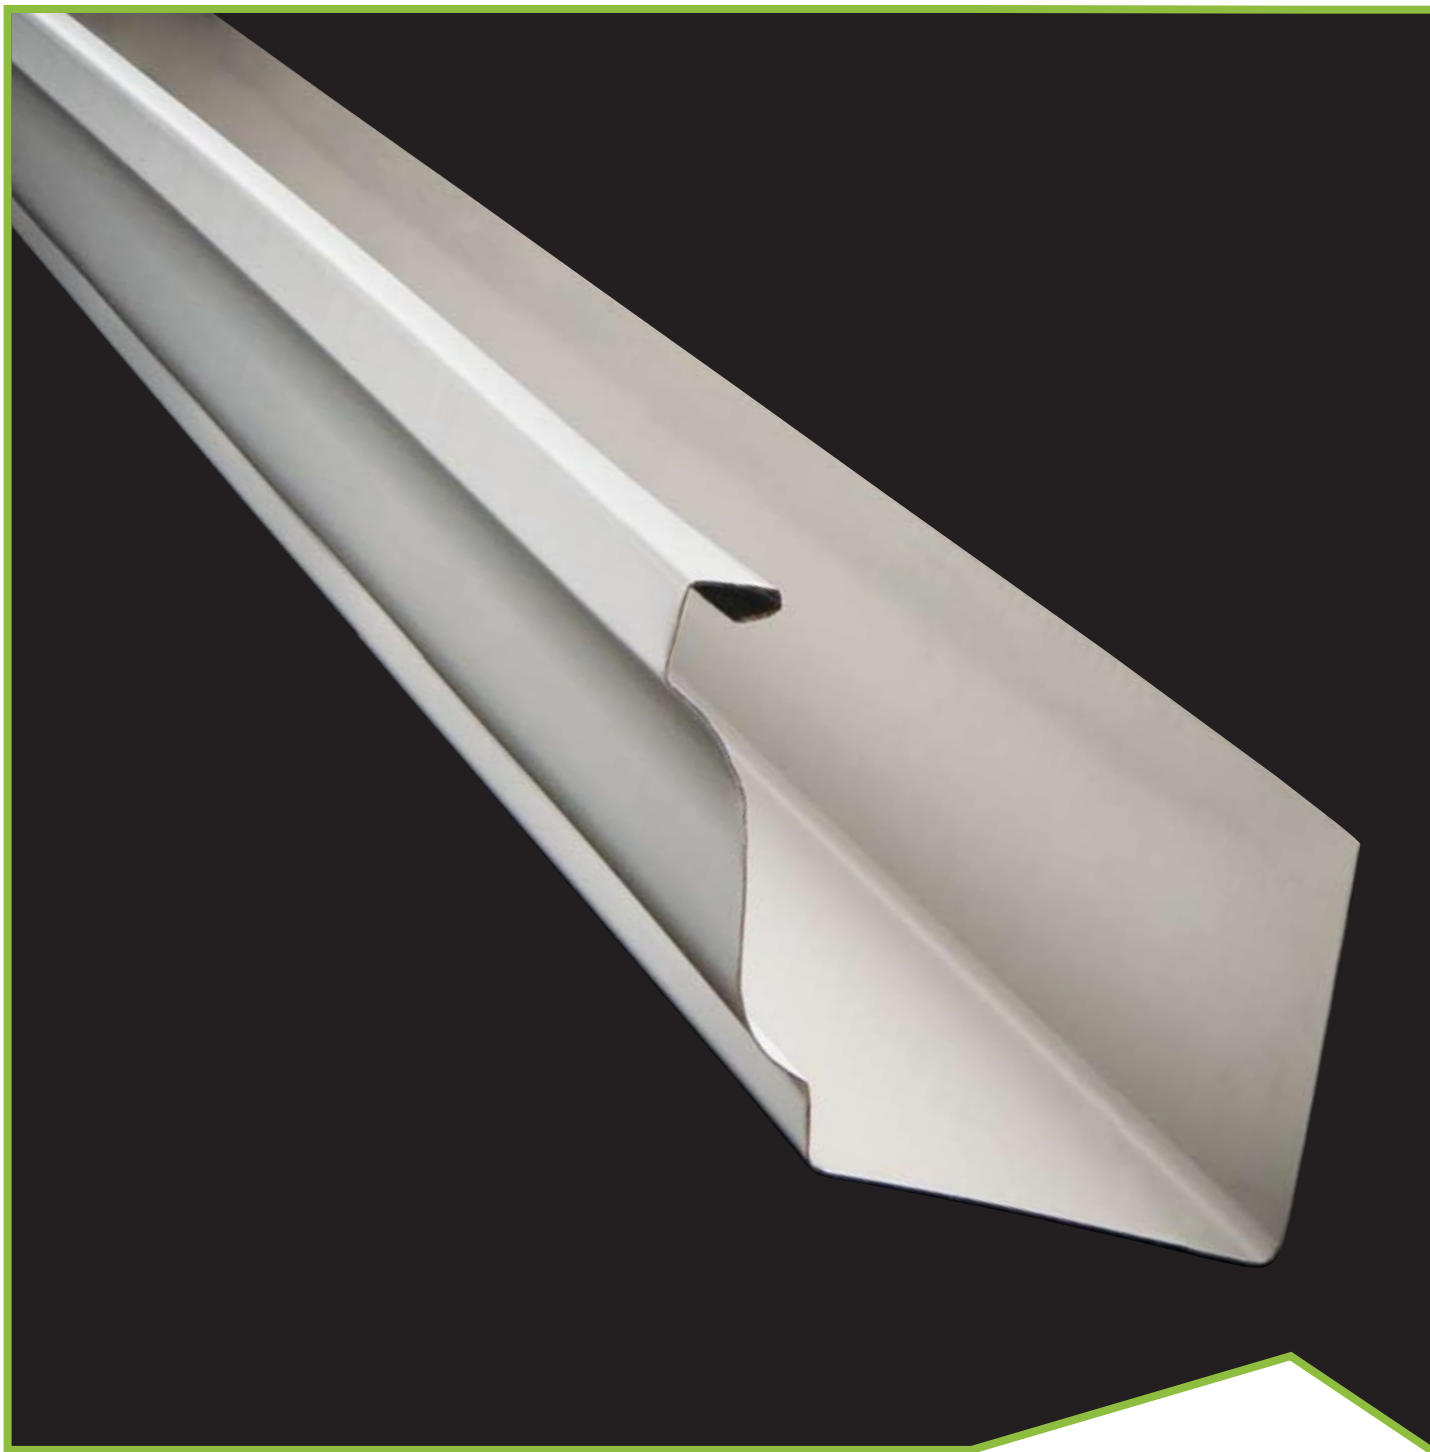

**Colorbond® Zinalume®**

Steeline OGEE Gutter is the ideal gutter to give your home the traditional colonial appearance. This gutter profile is especially popular for heritage style buildings. Steeline OGEE Gutter has its own distinctive look from the standard gutters available today and has excellent water carrying capacity. Steeline OGEE Gutter is made from quality COLORBOND® or ZINCALUME® Steel that is strong and long lasting.



**Ph. 1300 STEELINE**

**[www.steeline.com.au](http://www.steeline.com.au)**

**Service over and above**

## Installation

### Fixing to timber fascia

Fix a bracket at the high end of fall first, then fix a bracket at the low end of the fall. Stringline a common datum on both brackets and install the remaining brackets at the required spacings (not exceeding 1200mm), with common datum on the stringline.


The brackets are best attached to the fascia with the use of 20mm bugle head self drilling screws.

### Attaching gutter to brackets

Hook the front of the gutter onto the end of the long arm of the brackets and slide the back of gutter under the long arm until it is hard up to the back of the bracket. Push the gutter into the upright position, lifting the bottom of the gutter onto the platform provided by the bracket. When the gutter is in the correct position, turn down both tabs of the gutter brackets onto the back of the gutter, completing the attachment.


## Support Recommendations

Gutter brackets are to be placed at stop ends and between stop ends at intervals of no more than 1200mm. Where metal fascia is used, brackets must be placed within 150mm either side of the rafter brackets.

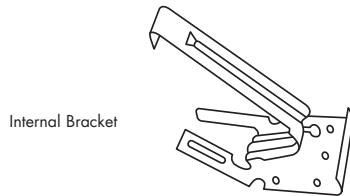


## External Corners

Cut the gutter ends at 45 as shown. Fix external and internal corner over mitred cuts, use rivets or screws and silicone. Allow 15 mm tabs on one side to slip inside the other section to rivet and seal.




## Internal Corners

Cut gutter ends at 45° as shown. Assemble in a similar manner to external corners. Allow 15 mm tabs on one side to slip inside the other section to rivet and seal.



## Gutter Joining

Reduce the top rib for 25mm to allow for a slip joint. Slide the reduced end into the other end, applying a suitable sealant, then blind rivet together.

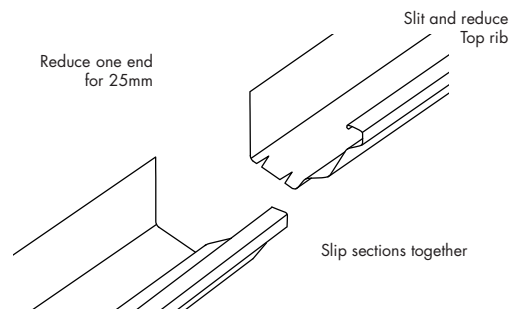

Steeline has over 40 locations operating in every state and territory

