


Steeline 64mm Top Hat Section

Top Hat Section

BU46

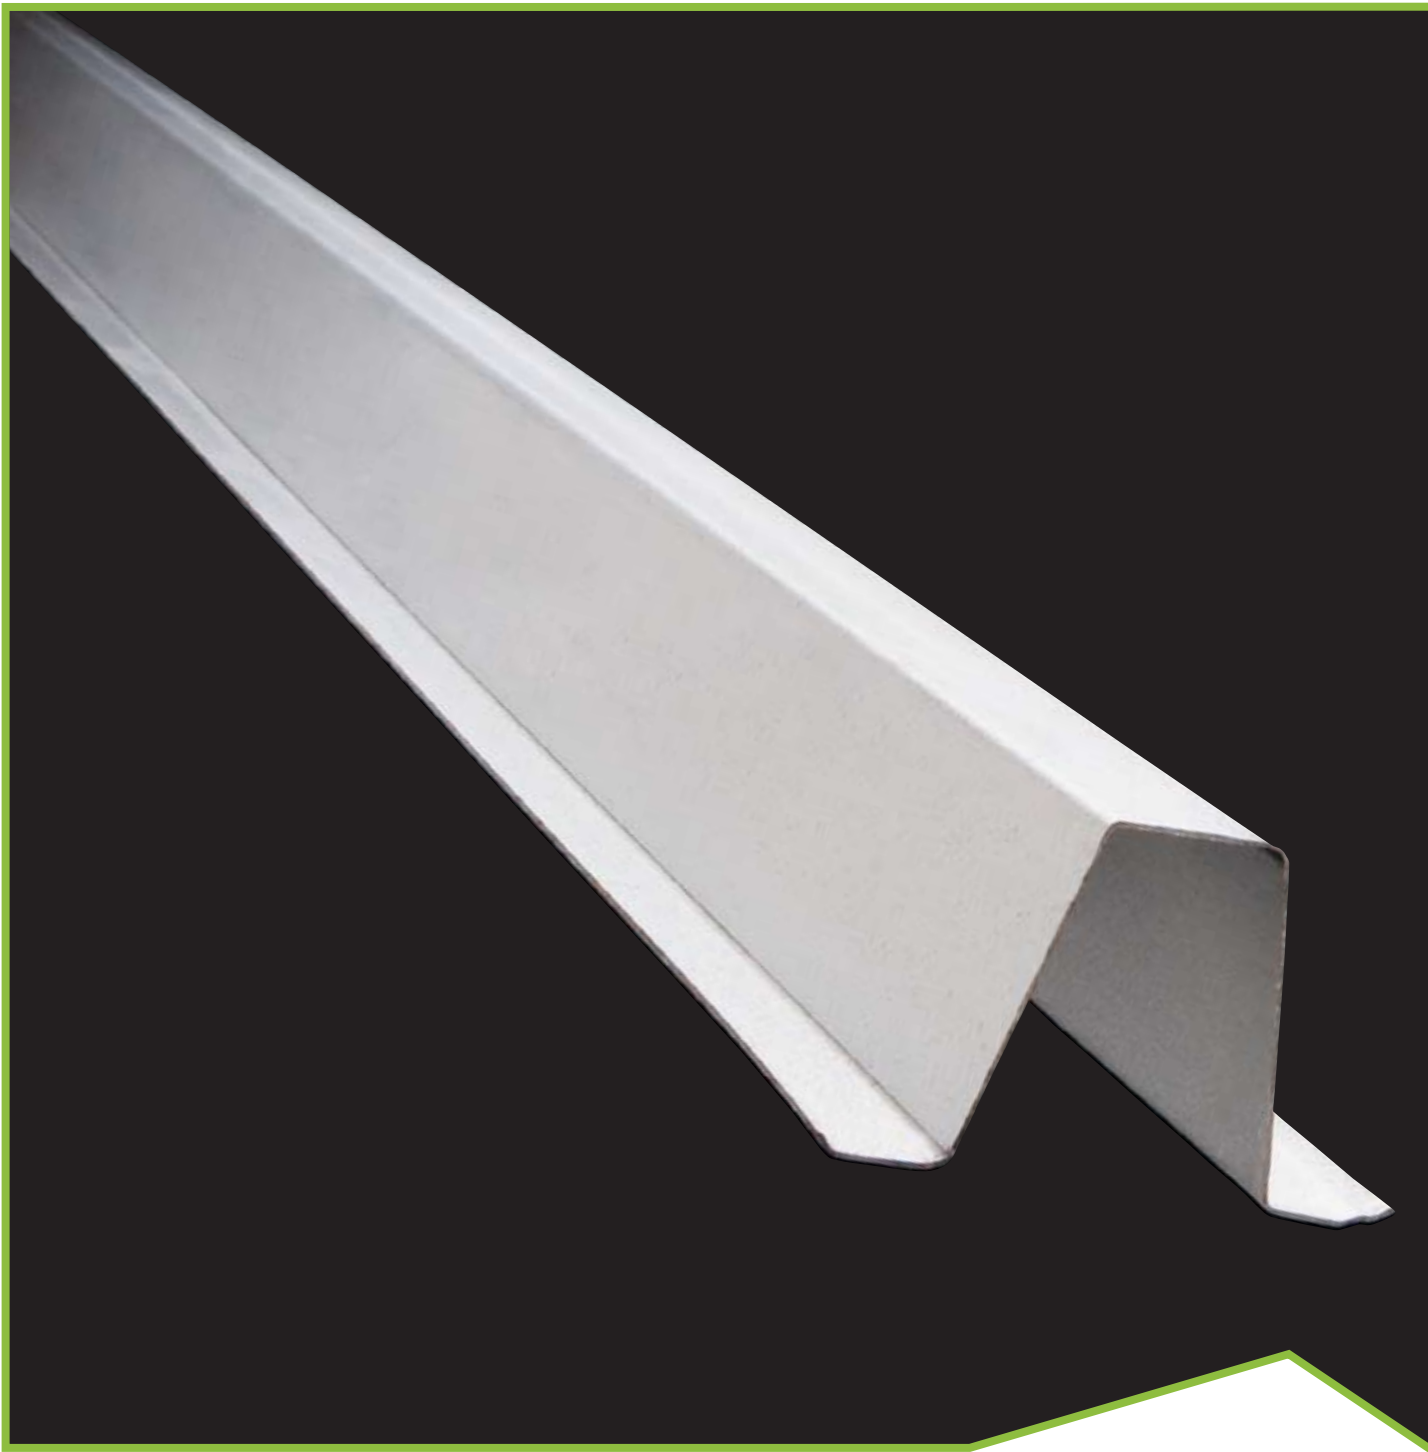

Zincalume®

Steeline Top Hat Section is made from ZINCALUME® steel and can be manufactured to your individual requirements or is also available in stock lengths. It is available in the following gauges 0.75 BMT, 1.0 BMT & 1.2 BMT to give you different spanning capabilities. This product is ideal to use for battens and wall girts on your garage, shed or carport.



Ph. 1300 STEELINE


www.steeline.com.au

Service over and above

Top hat sections

Structural metal top hat sections are a cost effective alternative to conventional purlins or timber on smaller type buildings like garages and small sheds. They are ideal to be used for wall girts and roof supports. They are fixed with the use of 14 x 22 metal TEK screws onto the columns and rafters through the bottom flange of the top hat sections. They have excellent spanning capabilities and are lap joined on longer runs.

Steel line top hat sections are available in 3 different thicknesses allowing them to be used in many different applications to suit your requirements. They are rollformed cut to length in thicknesses of 0.75 BMT, 1.0 BMT & 1.2 BMT. Made from hi-tensile Zinalume so you know they will stand the test of time. They comply with the Australian standards.

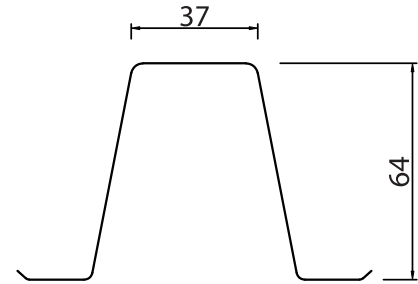

| BATTEN / GIRT FIXING TABLE | | | | |
|----------------------------|-----------------|-----------------|-----------------|-----------------|
| BAY SIZE METRES | N2 / N3 | C1 / N4 | C2 | C3 |
| 3.0 BAY | 2 x 12 / 14 Tek | 2 x 12 / 14 Tek | 2 x 12 / 14 Tek | 3 x 12 / 14 Tek |
| 3.5 BAY | 2 x 12 / 14 Tek | 2 x 12 / 14 Tek | 3 x 12 / 14 Tek | 4 x 12 / 14 Tek |

| PURLIN AND GIRTS SPAN TABLE DOUBLE LAPPED (3.0 M BAYS) | | |
|--|---------------------|---------------------|
| | WALL GIRTS | ROOF PURLINS |
| N2 | TH64 .75 @ 1350 CTS | TH64 .75 @ 1200 CTS |
| N3 | TH64 .75 @ 1350 CTS | TH64 .75 @ 1200 CTS |
| C1 / N4 | TH64 1.0 @ 1350 CTS | TH64 1.0 @ 1200 CTS |
| C2 | TH64 1.0 @ 1050 CTS | TH64 1.0 @ 900 CTS |
| C3 | TH64 1.2 @ 800 CTS | TH64 1.0 @ 800 CTS |

| PURLIN AND GIRTS SPAN TABLE DOUBLE LAPPED (3.5 M BAYS) | | |
|--|---------------------|---------------------|
| | WALL GIRTS | ROOF PURLINS |
| N2 | TH64 .75 @ 1250 CTS | TH64 .75 @ 1200 CTS |
| N3 | TH64 .75 @ 1100 CTS | TH64 .75 @ 900 CTS |
| C1 / N4 | TH64 1.2 @ 1200 CTS | TH64 1.2 @ 1050 CTS |
| C2 | TH64 1.2 @ 1100 CTS | TH64 1.2 @ 900 CTS |
| C3 | N/A | N/A |

Steel line has over 40 locations operating in every state and territory

